



# Motorola V60s Speakers Replacement

Written By: Eric Freeman

## INTRODUCTION

This is a guide showing how to replace the Motorola V60 speakers.



### TOOLS:

- [Spudger](#) (1)
- [T6 Torx Screwdriver](#) (1)

## Step 1 — Battery




- Remove battery cover by pushing down release lever at top of phone while prying off cover.
- Set cover aside.

## Step 2




- Remove battery by grabbing it near the bottom and lifting out.

### Step 3 — Speakers

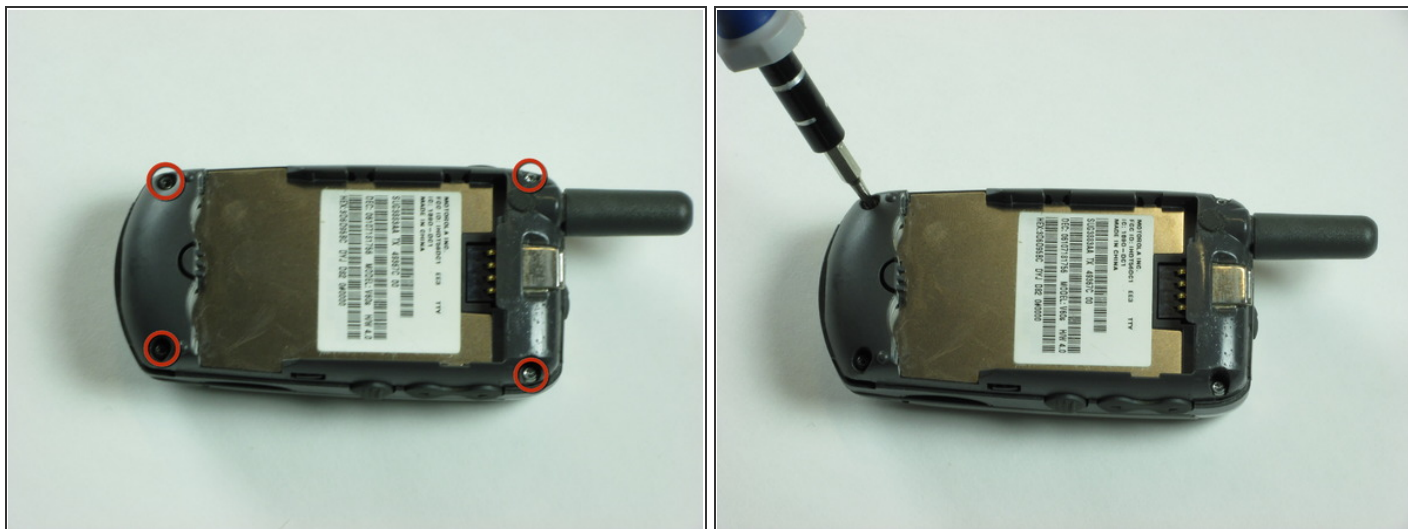


- Unscrew four corner screws with T6 screwdriver.
- Note: Top screws are silver and short while bottom screws are black and longer.

### Step 4

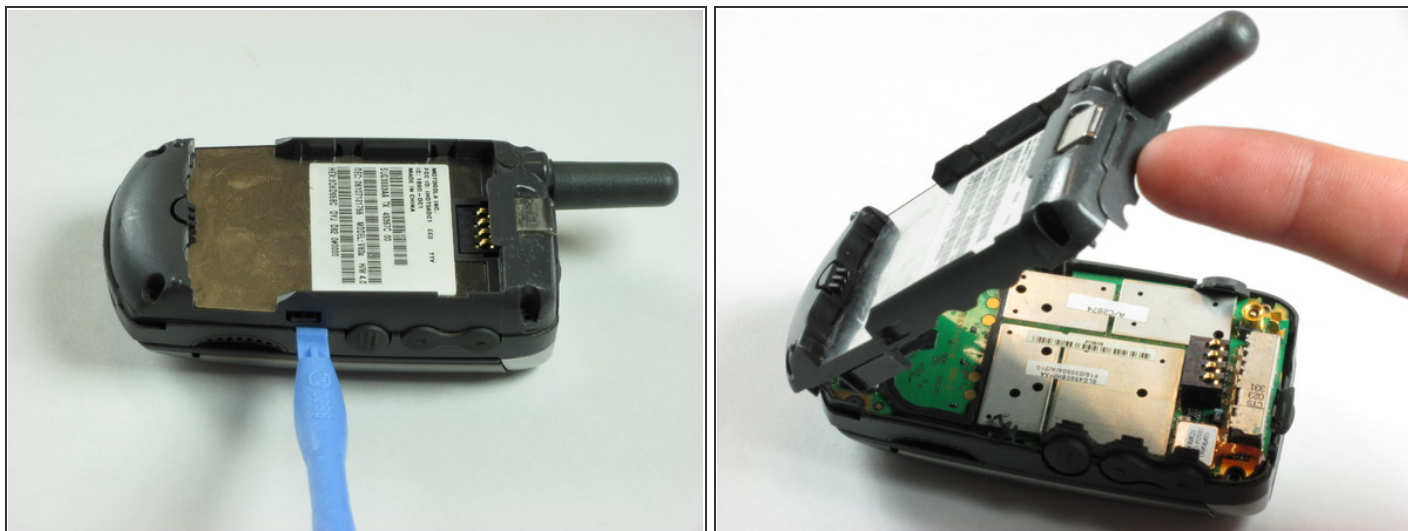

- Pry off back chassis by wedging spudger in crevice between back panel and phone and lifting.

## Step 5

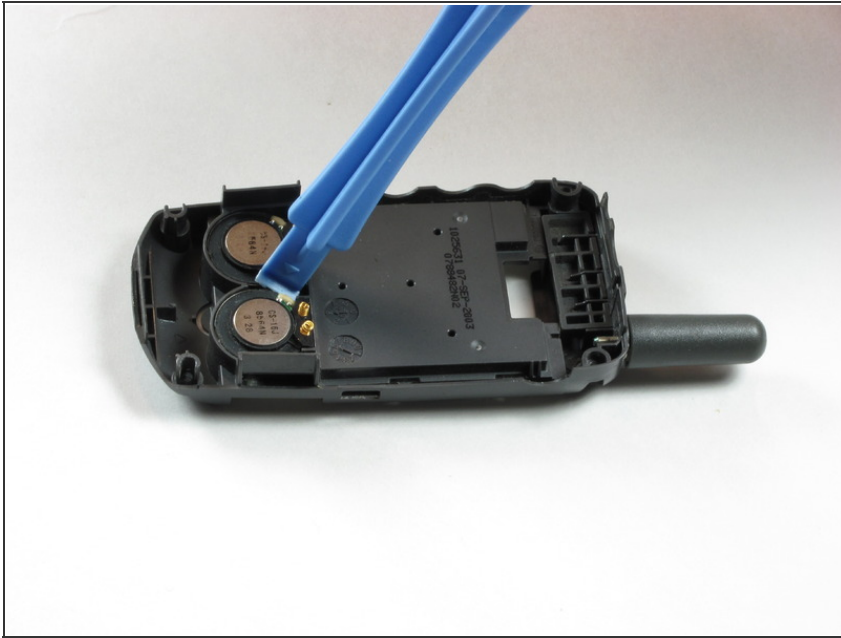

- Insert spudger between speaker and back chassis and lifting.
- Note: This may take some effort.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2015-05-01 01:09:22 PM.